



VERTEX


ROCKWELL HARDNESS TESTER Model: DNR-150




FEATURES:

- Manual handle wheel pre-load. Automatic main-load and testing cycle.
- Extended dolphin nose allows vertical test height of 300mm and throat depth of 220mm.
- The test force are applied via a closed-loop control unit with a load cell, a DC motor and an electronic measurement and control unit replace traditional dead weights. The result is highly accurate measurements at all test loads up to 0.5%.
- Simple plug - and - play tech allows for much more quick and easy installation than traditional weights type machine.
- Integrated casting body with more wide basement leads to permanent stability.
- RS232 and USB port to PC.

BASIC FUNCTIONS:

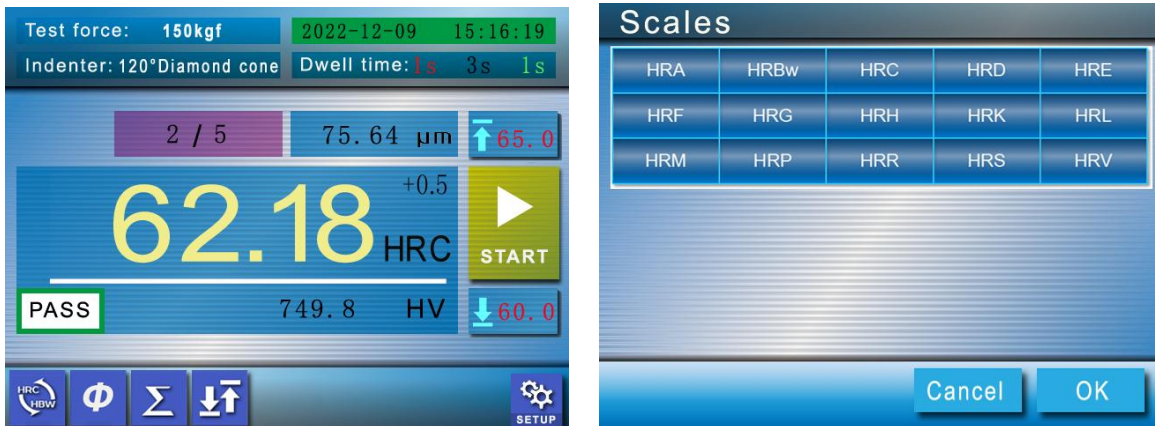

- Regular Rockwell hardness tester for metal and plastic material.
- Horizontal protrudent Indenter Design, suitable also for internal and external testing.
- Testing on Surfaces difficult to reach. Testing internal surface of rings and tubes.
- Provided with many features such as high measuring precision, wide measuring range with 15 Rockwell scales.
- The tester is suitable for testing of carbon steel, alloy steel, cast iron, non ferrous metal.
- Automatic testing cycle: Lifting of part, pre-loading, loading, dwell, unloading, results will be finished automatically.
- Measuring results digitally displaying and can be printed, or transmitted to external computer automatically by USB port.
- Test HR value can be convert to the value of HB, HV, HK and σ_b value.
- The tester meets all the following standard such as ISO 6508-2, ASTM E18.

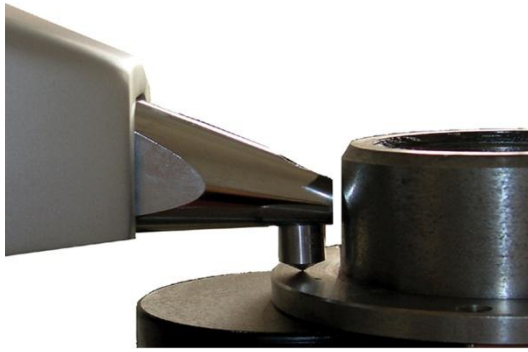

SPECIFICATION:

Parameters	
Preload	98.1N (10kgf)
Total test force	588.4N (60kgf), 980.7N (100kgf), 1471N (150kgf)
Scales	HRA, HRB, HRC, HRD, HRE, HRF, HRG, HRH, HRK, HRL, HRM, HRP, HRR, HRS, HRV
Resolution	0.01HR
Load dwell duration	2~50s, can be set and stored
Panel	Touch screen
Auxiliary function 1	Upper/lower limits setting & alarming
Auxiliary function 2	Data statistics: Avg., Max., Min., S, R
Auxiliary function 3	Curved surface auto correction
Auxiliary function 4	Scale conversion, HV, HBW, HK, σ_b etc.
Test Height (vertical)	300 mm
Depth of throat (horizontal)	220 mm
Dimensions	690mm×280mm×860mm
Power supply	AC, 220V/110V, 50~60Hz, 4A
Net weight	95 kg
Gross weight	125kg

Standard configuration		
1	Host machine	1
2	Standard hardness block for A scale	1
3	Standard hardness block for B scale	1
4	Standard hardness block for C scale	3
5	ball indenter (1/16")	1
6	120°cone diamond indenter	1
7	Mounting screws for indenter	2
8	Flat anvil	1
9	"V" shape anvil	1
10	Power supply wire	1
11	Screwdriver for indenter mounting	1
12	Dust cover	1



<https://www.vertexmachines.com/>



+91 93234 05785



info@vertexmachines.com

Actual product may differ in color and appearance due to constant development.